


## 19 Series - Inline - Push-to-Start - Push Button Reverse

Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle

- Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle
- Lightweight, ergonomic and durable handle designed with operator in mind
- Engineered to suit a wide range of applications, from fast-paced assembly to aerospace
- Grip material tested to withstand a range of industrial chemicals



Cleco 19 Series Inline

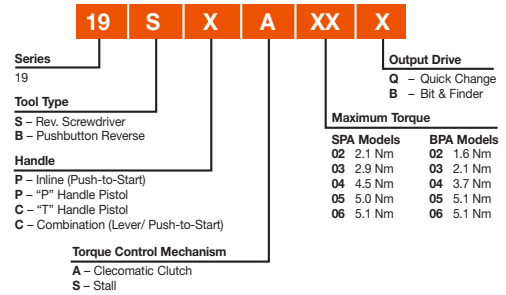

MODEL	TORQUE RANGE				FREE SPEED R/MIN	LENGTH IN	WEIGHT		OUTPUT DRIVE	AIR CONSUMPTION SCFM	AIR INLET SIZE IN
	MIN NM	MAX NM	MIN FT LB	MAX FT LB			LB	KG			
19BPA02Q	0.6	2.1	3	19	2300	9.3	1.41	0.64	1/4" QUICK CHANGE	11.0	1/8
19BPA03B	0.6	2.9	0.4	2.1	2300	9.9	1.41	0.64	BIT & FINDER	11.0	1/8
19BPA03Q	0.6	2.9	3	26	1600	9.3	1.41	0.64	1/4" QUICK CHANGE	11.0	1/8
19BPA04B	1.1	4.5	0.8	3.3	1600	9.9	1.41	0.64	BIT & FINDER	11.0	1/8
19BPA04Q	1.1	4.5	3	40	920	9.1	1.30	0.59	1/4" QUICK CHANGE	11.0	1/8
19BPA05B	1.1	5.1	0.8	3.7	920	9.9	1.30	0.59	BIT & FINDER	11.0	1/8
19BPA05Q	1.1	5.1	3	45	560	9.5	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8
19BPA06B	1.1	5.1	0.8	3.7	560	9.9	1.50	0.68	BIT & FINDER	11.0	1/8
19BPA06Q	1.1	5.1	3	45	220	9.5	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8

General: 90 psi (620kPa) required for maximum rated torque.

Standard Equipment: Operating instructions & service manual

Suspension bail

All torque springs required to meet indicated torque.

Lever Push-to-Start models include kit to convert to lever only. (301409)


## 19 Series - Inline - Push-to-Start - Collar Reverse

Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle

- Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle
- Lightweight, ergonomic and durable handle designed with operator in mind
- Engineered to suit a wide range of applications, from fast-paced assembly to aerospace
- Grip material tested to withstand a range of industrial chemicals



Cleco 19 Series Inline

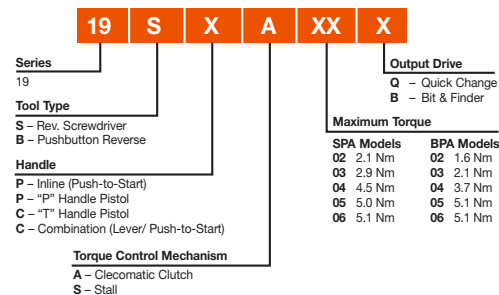

MODEL	TORQUE RANGE				FREE SPEED R/MIN	LENGTH IN	WEIGHT		OUTPUT DRIVE	AIR CONSUMPTION SCFM	AIR INLET SIZE IN
	MIN NM	MAX NM	MIN FT LB	MAX FT LB			LB	KG			
19SPA02B	0.6	2.1	3	19	2800	9.7	1.41	0.64	BIT & FINDER	11.0	1/8
19SPA02Q	0.6	2.1	3	19	2800	9.1	1.41	0.64	1/4" QUICK CHANGE	11.0	1/8
19SPA03B	0.6	2.9	3	26	1900	9.9	1.41	0.64	BIT & FINDER	11.0	1/8
19SPA03Q	0.6	2.9	3	26	1900	9.3	1.41	0.64	1/4" QUICK CHANGE	11.0	1/8
19SPA04B	1.1	4.5	3	40	1100	9.7	1.30	0.59	BIT & FINDER	11.0	1/8
19SPA04Q	1.1	4.5	3	40	1100	9.1	1.30	0.59	1/4" QUICK CHANGE	11.0	1/8
19SPA05B	1.1	5.1	3	45	660	10.1	1.50	0.68	BIT & FINDER	11.0	1/8
19SPA05Q	1.1	5.1	3	45	660	9.5	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8
19SPA06Q	1.1	5.1	3	45	260	9.5	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8

General: 90 psi (620kPa) required for maximum rated torque.  
 Standard Equipment: Operating instructions & service manual  
 Suspension bail  
 All torque springs required to meet indicated torque.  
 Lever Push-to-Start models include kit to convert to lever only. (301409)


## 19 Series - Inline - Push and Lever Start - Collar Reverse

Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle

- Durable Clecomatic Clutch delivers best-in-class torque repeatability and long calibration cycle
- Lightweight, ergonomic and durable handle designed with operator in mind
- Engineered to suit a wide range of applications, from fast-paced assembly to aerospace
- Grip material tested to withstand a range of industrial chemicals



Cleco 19 Series Inline

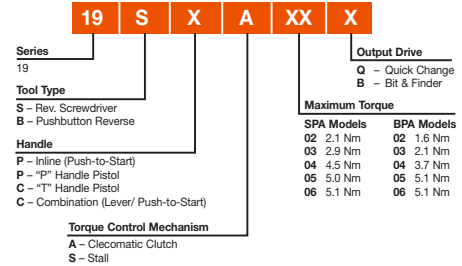

MODEL	TORQUE RANGE				FREE SPEED	LENGTH	WEIGHT		OUTPUT DRIVE	AIR CONSUMPTION	AIR INLET SIZE
	MIN NM	MAX NM	MIN FT LB	MAX FT LB	R/MIN	IN	LB	KG		SCFM	IN
19SCA02Q	0.6	2.1	3	19	2800	9.8	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8
19SCA03Q	0.6	2.9	3	26	1900	10.0	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8
19SCA04Q	1.1	4.5	3	40	1100	9.8	1.50	0.68	1/4" QUICK CHANGE	11.0	1/8
19SCA05Q	1.1	5.1	3	45	660	10.2	1.61	0.73	1/4" QUICK CHANGE	11.0	1/8
19SCA06Q	1.1	5.1	3	45	260	10.2	1.61	0.73	1/4" QUICK CHANGE	11.0	1/8

General: 90 psi (620kPa) required for maximum rated torque.

Standard Equipment: Operating instructions & service manual

Suspension bail

All torque springs required to meet indicated torque.

Lever Push-to-Start models include kit to convert to lever only. (301409)