

15L14 Series - Right Angle Drill

0.3hp / 0.22kW

1500-20000rpm

Up to 1/4" Capacity

- Chuck, Collet and 1/4"-28 internal output options
- Rear Exhaust
- Lock off Safety lever standard



MODEL	TERMINATION	SPEED	WEIGHT	LENGTH
		R/MIN	LB	IN
15L1487-32	1/4"-28 I	1500	1.2	8.0
15L1487-36	1/4" COLLET	1500	1.2	8.0
15L1487-38	1/4" CHUCK	1500	1.5	8.0
15L1488-36	1/4" COLLET	2400	1.6	8.7
15L1488-38	1/4" CHUCK	2400	1.5	8.0
15L1489-32	1/4"-28 I	3600	1.6	8.7
15L1489-36	1/4" COLLET	3600	1.6	8.7
15L1489-38	1/4" CHUCK	3600	1.5	8.0
15L1489-51	3/8" CHUCK	3600	1.5	8.0
15L1470-37	5/32" CHUCK	12000	1.2	6.9
15L1401-37	5/32" CHUCK	20000	1.0	6.2
15L1471-37	5/32" CHUCK	20000	1.2	6.9

All tools performance rated @ 90psi / 620 kPa air pressure.

Air inlet size: 1/4in


Minimum Hose I.D.: 1/4in / 6.4mm

Standard Equipment: Jacobs geared chuck, chuck key

Drill diameter capacity matches chuck size.

15LF Series - Right Angle Drill - Light Duty/
Small Head Height

0.4hp / 0.30kW
600-5300rpm
Ideal for Restricted Access Applications

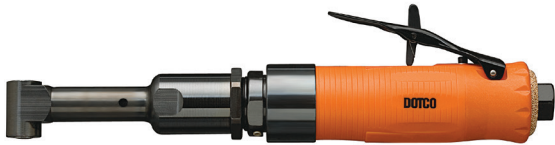

Hand Drilling, Countersinking & Spotfacing

- 62 1/4"-28 Internal thread standard
- Other terminations available:
 - 61 10-32 Internal Thread
 - 63 Threaded Collet
 - 64 5/16"-24 Internal Thread
- Other Angle Heads Available:
 - 5X Heavy Duty
 - 7X Compact Style
 - 4X 45 degree Angle Head
 - 9X 360 degree Angle Head
- Rear Exhaust
- Lock off safety lever standard

MODEL	TERMINATION	SPEED	WEIGHT	LENGTH
		R/MIN	LB	IN
15LF287-62	1/4"-28 I	600	1.9	11.8
15LF286-62	1/4"-28 I	750	1.9	11.8
15LF285-62	1/4"-28 I	1000	1.9	11.8
15LF284-62	1/4"-28 I	2400	1.8	11.1
15LF283-62	1/4"-28 I	3300	1.6	10.7
15LF282-62	1/4"-28 I	4000	1.6	10.7
15LF281-62	1/4"-28 I	5300	1.6	10.7

All tools performance rated @ 90psi / 620 kPa air pressure.
Air inlet size: 1/4in
Minimum Hose I.D.: 1/4in / 6.4mm
Standard Equipment: Jacobs geared chuck, chuck key
Drill diameter capacity matches chuck size.