

PISTOL\*

MODEL NUMBER	TORQUE RANGE (Nm) Min-Max	TORQUE RANGE (ft-lb) Min-Max	SPEED r/min	WEIGHT* kg (lb)	LENGTH mm (in)	SIDE TO CENTER mm (in)	HEIGHT mm (in)	OUTPUT
CCBPW04Q	1.2 - 4	0.9 - 2.9	2480	0.98 (2.16)	185 (7.27)	29 (1.14)	204 (8.03)	1/4" Hex Quick Change
CCBPW12Q	3.6 - 12	2.7 - 8.8	800	1.05 (2.32)	201 (7.89)	29 (1.14)	204 (8.03)	1/4" Hex Quick Change
CCBPW123	3.6 - 12	2.7 - 8.8	800	1.05 (2.32)	198 (7.79)	29 (1.14)	204 (8.03)	3/8" Square Drive
CCBPW22Q	6.6 - 22	4.9 - 16.2	430	1.05 (2.32)	201 (7.89)	29 (1.14)	204 (8.03)	1/4" Hex Quick Change
CCBPW223	6.6 - 22	4.9 - 16.2	430	1.05 (2.32)	198 (7.79)	29 (1.14)	204 (8.03)	3/8" Square Drive

\*weight values do not include battery

RIGHT ANGLE\*

MODEL NUMBER	TORQUE RANGE (Nm) Min-Max	TORQUE RANGE (ft-lb) Min-Max	SPEED r/min	WEIGHT* kg (lb)	LENGTH mm (in)	SIDE TO CENTER mm (in)	HEIGHT mm (in)	OUTPUT
CCBAW153	4.5 - 15	3.3 - 11.0	570	1.70 (3.75)	456 (17.95)	31.8 (1.25)	88 (3.46)	3/8" Square Drive - Pin Detent
CCBAW153B	4.5 - 15	3.3 - 11.0	570	1.70 (3.75)	456 (17.95)	31.8 (1.25)	88 (3.46)	3/8" Square Drive - Ball Retainer
CCBAW253	7.5 - 25	5.5 - 18.4	305	1.70 (3.75)	456 (17.95)	31.8 (1.25)	88 (3.46)	3/8" Square Drive - Pin Detent
CCBAW253B	7.5 - 25	5.5 - 18.4	305	1.70 (3.75)	456 (17.95)	31.8 (1.25)	88 (3.46)	3/8" Square Drive - Ball Retainer
CCBAW353	10.5 - 35	7.7 - 25.8	255	1.95 (4.30)	486 (19.15)	31.8 (1.25)	92 (3.63)	3/8" Square Drive - Pin Detent
CCBAW353B	10.5 - 35	7.7 - 25.8	255	1.95 (4.30)	486 (19.15)	31.8 (1.25)	92 (3.63)	3/8" Square Drive - Ball Retainer
CCBAW503	15 - 50	11.1 - 36.8	165	2.00 (4.41)	499 (19.65)	31.8 (1.25)	92 (3.63)	3/8" Square Drive - Pin Detent
CCBAW503B	15 - 50	11.1 - 36.8	165	2.00 (4.41)	499 (19.65)	31.8 (1.25)	92 (3.63)	3/8" Square Drive - Ball Retainer

\*weight values do not include battery

CELLCORE HIGH TORQUE\*

MODEL NUMBER	TORQUE RANGE (Nm) Min-Max	TORQUE RANGE (ft-lb) Min-Max	SPEED r/min	WEIGHT* kg (lb)	LENGTH mm (in)	SIDE TO CENTER mm (in)	HEIGHT mm (in)	OUTPUT
CCBPWN200D6	40-195	29.5-143.8	42	3.36 (7.41)	339 (13.35)	28 (1.10)	204 (8.03)	3/4" Square Drive
CCBPWN500D6	119-500	87.8-368.8	14	3.36 (7.41)	339 (13.35)	28 (1.10)	204 (8.03)	3/4" Square Drive
CCBPWN1000D6	214-1000	157.8-737.6	8	6.68 (14.73)	403 (15.87)	40 (1.57)	208 (8.19)	3/4" Square Drive
CCBPWN1350D8	293-1350	216-995.7	6	6.68 (14.73)	403 (15.87)	40 (1.57)	208 (8.19)	1" Square Drive
CCBPWN2000D8	436-2000	321.6-1475	4	6.68 (14.73)	403 (15.87)	40 (1.57)	208 (8.19)	1" Square Drive

\*weight values do not include battery

ACCESSORIES

MODEL NUMBER	DESCRIPTION	MODEL NUMBER	DESCRIPTION
T50-1000497	18V, 2.0Ah Battery (.43kg/.94lb)	T50-1000508	18V 6-Bay Sequential Charger (Europe, Middle East, Africa)
T50-1000498	18V, 5.0Ah Battery (.72kg/1.60lb)	T50-1000543	18V Charger (Argentina)
T50-1000499	18V Rapid Charger (NA)	T50-1000544	18V Rapid Charger (United Kingdom)
T50-1000500	18V 6-Bay Sequential Charger (NA)	T50-1000545	18V Rapid Charger (China)
T50-1000506	18V Rapid Charger (Europe, Middle East, Africa)	T50-1000547	18V 6-Bay Sequential Charger (United Kingdom)

T50-1000656	CellCore 15 & 25 Nm RA Output Drive Scratch Cover	T50-1000659	CellCore 4 Nm Pistol Output & Screen Cover
T50-1000657	CellCore 35 Nm RA Output Drive Scratch Cover	T50-1000660	CellCore 12 & 22 Nm Pistol Output & Screen Cover
T50-1000658	CellCore 50Nm RA Output Drive Scratch Cover		

The Americas

Apex Tool Group  
670 Industrial Drive  
Lexington, SC 29072  
USA  
Tel.: +1 (800) 845 5629  
Tel.: +1 (919) 387 0099  
Fax: +1 (803) 358 7681  
www.ClecoTools.com

Apex Tool Group  
Manufacturing México  
S. de R.L. de C.V.  
Vialidad El Pueblito #103  
Parque Industrial Querétaro  
Querétaro, QRO 76220  
México  
Tel.: +52 (442) 211 3800  
Fax: +52 (800) 685 5560

Apex Tool Group  
Ind. Com. Ferram. Ltda. Av.  
Liberdade, 4055  
Zona Industrial Iporanga  
Sorocaba, São Paulo  
CEPH 18087-170  
Brazil  
Tel: +55 15 3238 3870  
Fax: +55 15 3238 3938

Europe | Middle East | Africa

Apex Tool Group GmbH  
Industriestraße 1  
73463 Westhausen  
Germany  
Tel.: +49 (0) 73 63 81 0  
Fax: +49 (0) 73 63 81 222  
www.ClecoTools.de

Apex Tool Group SAS  
25 Avenue Maurice Chevalier  
77330 Ozoir-La-Ferrière  
France  
Tel: +33 16 44 32 200  
Fax: +33 16 44 317 17

Apex Tool Group  
Hungaria Kft.  
Platánfa u.2  
9027 Győr  
Hungary  
Tel.: +36 96 66 1383  
Fax: +36 96 66 1135

Asia Pacific

Apex Power Tool Trading  
(Shanghai) Co., Ltd.  
2nd Floor, Area C  
177 Bi Bo Road  
Pu Dong New Area, Shanghai  
China 201203 P.R.C.  
Tel.: +86 21 60880320  
Fax: +86 21 60880298

Apex Power Tools India  
Private Limited  
Gala No. 1, Plot No. 5  
S. No. 234, 235 & 245  
Indialand Global Industrial Park  
Taluka-Mulsi, Phase I  
Hinjawadi, Pune 411057  
Maharashtra, India  
Tel.: +91 020 66761111

EASY TO HANDLE. HARD TO BREAK.



THE SMARTEST TOOL FOR THE TOUGHEST ENVIRONMENT



CellCore<sup>™</sup> puts you in control with cordless assembly tools that are **easy to handle**, and **hard to break**.

Cleco's new CellCore<sup>™</sup> Cordless Assembly Tools are smart, durable and designed to withstand the toughest environments. The lightweight ergonomic design reduces operator fatigue while delivering state-of-the-art power, weight and balance. A large user interface makes it quick and easy to program rundowns on the tool without a controller.



**Durable** - Assembly line tough (Drop tested up to 5 feet)



**Ergonomic** - Reduces operator fatigue while delivering state-of-the-art power and intelligence



**Reliable** - Increases uptime with 500k cycles between maintenance



**Easy to Use** - Large user interface allows easy on-the-tool programming without a controller

**EASY TO HANDLE. HARD TO BREAK.**




**CellCore is the most versatile, easy-to-use cordless tool in the industry.**

Users can program up to 10 rundown strategies, called "FastApps", directly on the tool in standalone mode. Users can also pair CellCore tools with Cleco's new mPro200 controller. By pairing the devices, users can easily capture data in real time and program advanced rundowns within a much more compact footprint.

## THE SMARTEST TOOL FOR THE TOUGHEST ENVIRONMENT



### CellCore High Torque

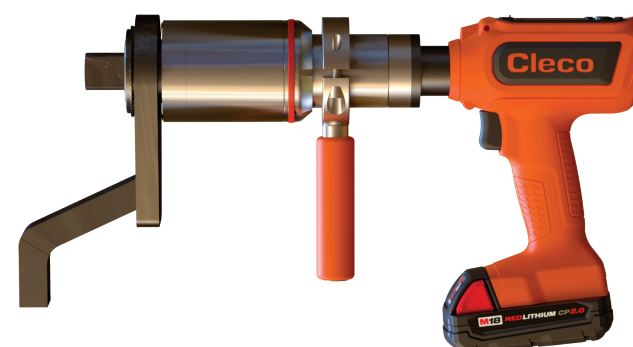

- FastApps** - Program up to 10 applications directly on the tool or connect to a controller for maximum functionality
- Versatile** - 40-2000Nm range allowing more flexibility in your tool
- Reliable** - Norbar<sup>®</sup> torque multiplier provides proven accuracy and quality
- Access** - 360° rotating head and handle for maximum accessibility

**ALL  
NEW**